LOW DIFFERENTIAL PRESSURE GAUGE TEA 2000 MODEL

Service intended

Series TE2000 MAGRFHELIC® Differential Pressure Gauges are widely utilized for measuring pressure of fan and blowing machine, resistance of filter, wind speed, furnace pressure, differential pressure of pore plate, the pressure of drum water level, liquid amplifier and hydraulic pressure system. Meantime, they are used to control the automatic valve and specific value of air-producer gas in combustion and they are used to test blood pressure and respiratory pressure in medical health care equipment. There are more than 81 models to suit your needs precisely. The key components adopt import materials.



Key attributes

Measurement Range	30Pa~60KPa (Special ranges also can be customized	Pressure Gauge Type	Differential Pressure Gauges
place of origin	Zhejiang, China	model number	TE2000
brand name	MAGRFHELIC	customized support	OEM
material	aluminum	warranty	1 Year
Brand Name	MAGRFHELIC	Product Name	Differential Pressure Gauge
Range	30Pa~60KPa (Special ranges also can be customized)	Pressure Rating	15 PSI (1.03 bar)
Accuracy	±2% of FS (±3% on - 0, and ±4% on - 00,)	Ambient Temperature	-7 ~ 60 °C
Weight	0.55kg	Housing Color	Gray, golden
Hot-sale Ranges	0-60Pa, 0-500Pa, ±60Pa. 0-300MM	Product keywords	differential pressure gauge

LIEN TIEN
Leading industrial instruments supplier

Specifications


Pressure Rating:	15 PSI (1.03 bar)
Ambient Temperature:	20° to 140° F (-7 to 60 ℃)
Overpressure:	Protective rubber stopper will be blown out if rated pressure is up to about 172KPa.
Process Connections:	Die cast aluminum case and bezel, with acrylic cover, Exterior finish is coated gray to withstand 168 hour salt spray corrosion test
Accuracy:	±2% of FS (±3% on -0, and ±4% on -00,)
Range:	30Pa~80KPa (Special Specification also can be ordered.)
Weight:	0.55 kg
Dimensions:	4-3/4 "dia. x 2-3/16"deep
Housing Color:	Gray, golden
Connections:	1/8"female NPT high and low pressure taps, duplicated, one pair side and one pair back.




Ranges *various ranges can be ordered*

	Pa	Kpa	Inches of Water	MM of Water	Dual Scale	
RANGES FOR REFERENCE	0-30	0-0.5	0-.25	0-6	in w.cc	Pa or Kpa
	0-60	0-1	0-.50	0-10	0-.25	0-62 Pa
	0-100	0-1.5	0-1.0	0-15	0-0.5	0-125 Pa
	0-125	0-2	0-2.0	0-25	0-1.0	0-250 Pa
	0-300	0-5	0-8.0	0-30	0-2.0	0-500 Pa
	0-500	0-8	0-10	0-50	0-3.0	0-750Pa
	-30-0-30	0-10	0-20	0-80	0-4.0	0-1.0kPa
	-60-0-60	0-20	0-50	0-100	0-5.0	0-1.25kPa
	-100-0-100	0-30	0-100	0-125	0-6.0	0-1.5kPa
	-250-0-250	0-50	0-180	0-200	0-8.0	0-2.0kPa
	-500-0-500	0-60	0-250	**0-300**	0-0.5	0-2.5kPa
	VARIOUS RANGES CAN BE CUSTOMIZED FOR YOU					

LIEN TIEN
Leading industrial instruments supplier

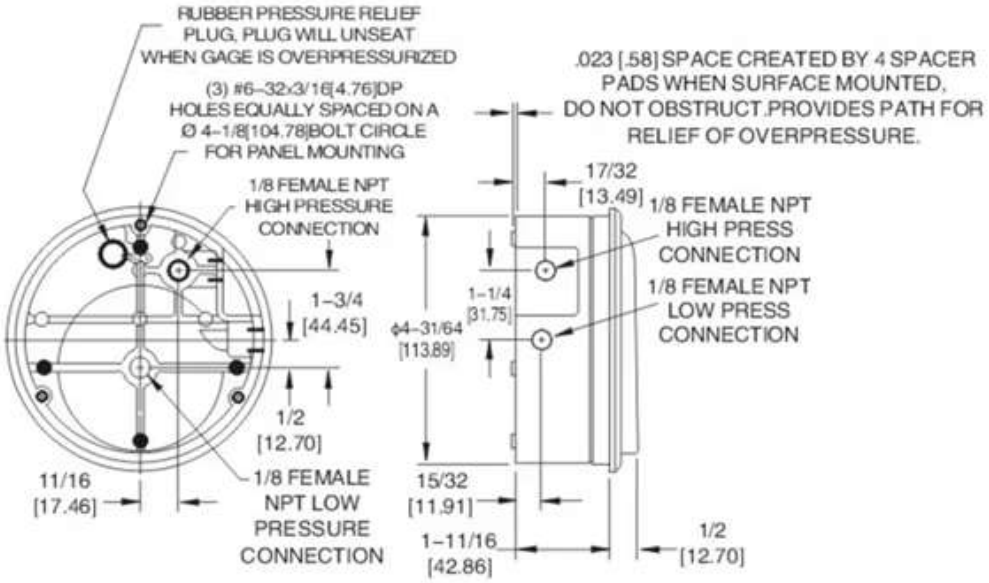

MOUNTING DRAWING

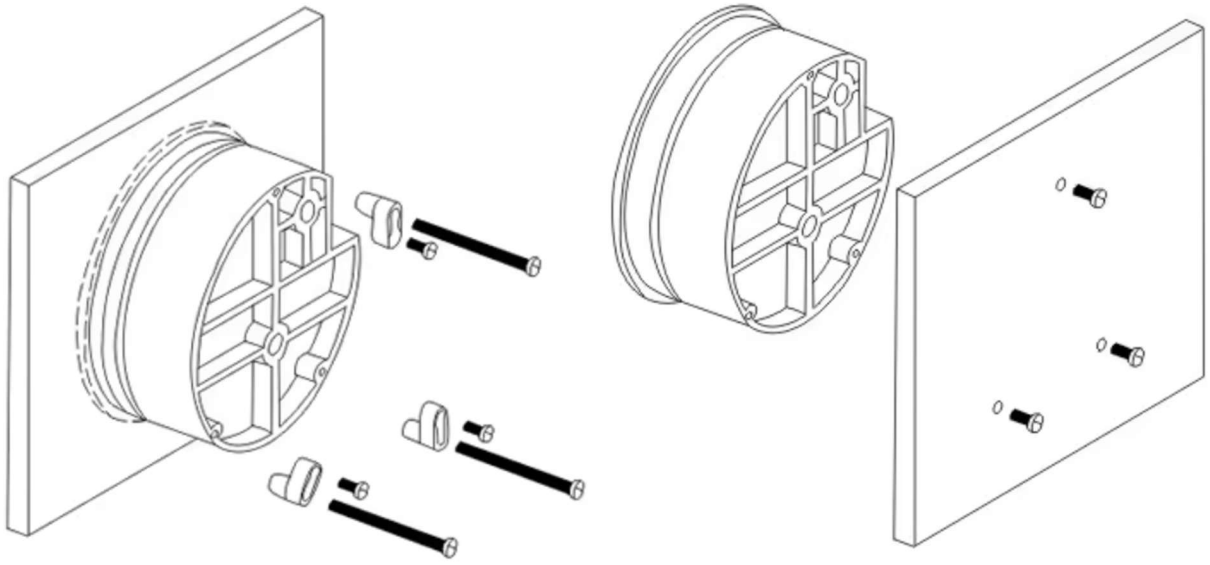

■FLUSH MOUNTING

■SURFACE MOUNTING

LIEN TIEN

Leading industrial instruments supplier